
DIN Swivel Fitting/ DKO Swivel Connector



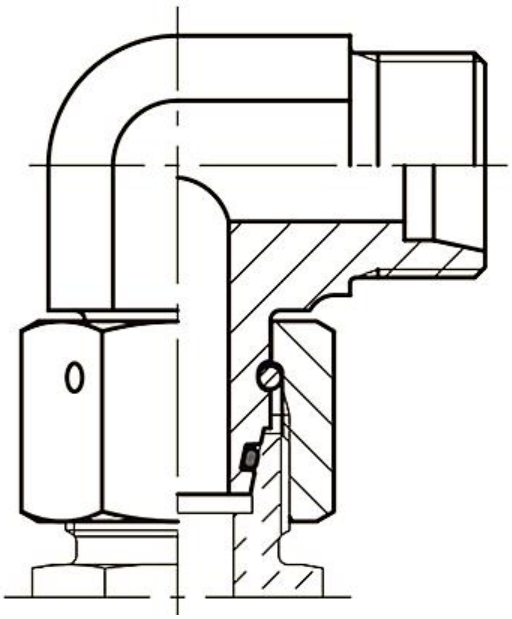

Industry Standard:

DIN 3865/ DIN 2353 / ISO 8434-4

Design Type:

DKO Swivel with O-ring SWO

Material:

Carbon Steel/Stainless Steel

Finish:

Zinc Plated/ZnNi Alloy

Body Type:

Straight(S),Elbow(E),Tee(T)










FITSCH

DIN Swivel Fittings Introduction

DIN swivel fittings is most popular Ermeto adjustable high pressure tube fittings, it is often found in the work of connection straight stud connector to hydraulic tube or hose assemble.


Overview shapes Of DIN Swivel Fittings

Tube or stud to swivel connector is made of these shapes(ISO-Parker-Eaton series no), from hex bar or forging body as follows:

Straight (RDSW/RED/2C) 	**Elbow (SWOE/EW/2C9)** 	**Elbow (SWOE45/EV/2C4)** 
Tee (SWORT/EL/CC) 	**Tee (SWOBT/ET/BC)** 	**Straight Union(GZ/3C)** 
Reducer(GZR/3C) 	**Metric Stud(SWOSDS/EGE-M-ED/2MC-WD)** 	**BSPP Stud(SWOSDS/EGE-R-ED/2BC-WD)** 

Dimensions Of DIN 24 degree swivel fittings and torque of assemble DKO

Deign is thrust wire nut, 24 degree cone with o-ring nipple, meet DIN 3865/DIN EN ISO 8434-4.

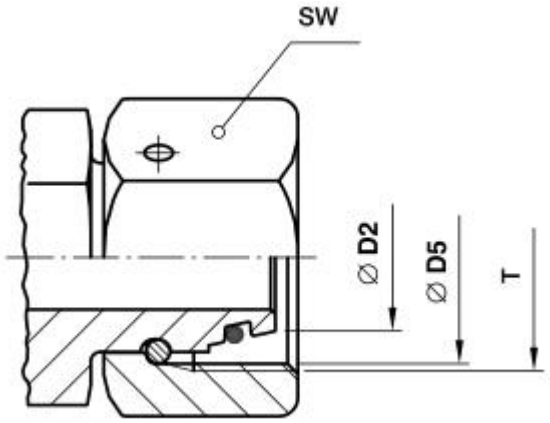

Tube O.D. Size	T	∅ D2 mm	∅ D5 mm Thread core diameter	SW mm	**Torque of assemble DKO**
L SERIES					
06-L	M 12×1.5	5.5	10.38	14	
08-L	M 14×1.5	7.5	12.38	17	
10-L	M 16×1.5	9.7	14.38	19	
12-L	M 18×1.5	11.7	16.38	22	
15-L	M 22×1.5	14.7	20.38	27	
18-L	M 26×1.5	17.7	24.38	32	
22-L	M 30×2	21.7	27.84	36	
28-L	M 36×2	27.7	33.84	41	
35-L	M 45×2	34.5	42.84	50	
42-L	M 52×2	41.5	49.84	60	
S SERIES					
06-S	M 14×1.5	5.5	12.38	17	
08-S	M 16×1.5	7.5	14.38	19	
10-S	M 18×1.5	9.7	16.38	22	
12-S	M 20×1.5	11.7	18.38	24	
14-S	M 22×1.5	13.5	20.38	27	
16-S	M 24×1.5	15.5	22.38	30	
20-S	M 30×2	19.5	29.84	36	
25-S	M 36×2	24.5	33.84	46	
30-S	M 42×2	29.5	39.84	50	
38-S	M 52×2	37.5	49.84	60	

Functions of DKO swivel connector Technology

Double sealing with o-ring and metallic cone

Long-lasting seal of this connection for vibration situation

High cost effective by less maintenance, easy to assembly.

Technical Specifications

Materials of Construction:Steel, Stainless steel

Product Series:Light and Heavy

Tube Outside Diameter: 6-42 mm

Maximum Operating Temperature:+250 Steel, +400 Stainless Steel °C, +482 Steel, +752 Stainless Steel °F


Maximum Operating Pressure:16-80 MPa, 160-800 bar, 2321-11603 psi

Connection Type:Bite Type, Soft Seal Bite Type

Minimum Operating Temperature:-40 (Steel); -60 (Stainless Steel) °C, -40 Steel, -76 Stainless Steel °F

Application:Agriculture Equipment, Automotive Process, Chemical Transfer, Construction Equipment, Fuel transfer, Hydraulic, Manufacturing Equipment, Marine, Material Handling, Mobile Equipment, Oilfield, Packaging, Transportation


Technical dimensions of 24 degree cone fitting with o-ring weld-on nipple as per ISO 8434-4 and DIN 3865

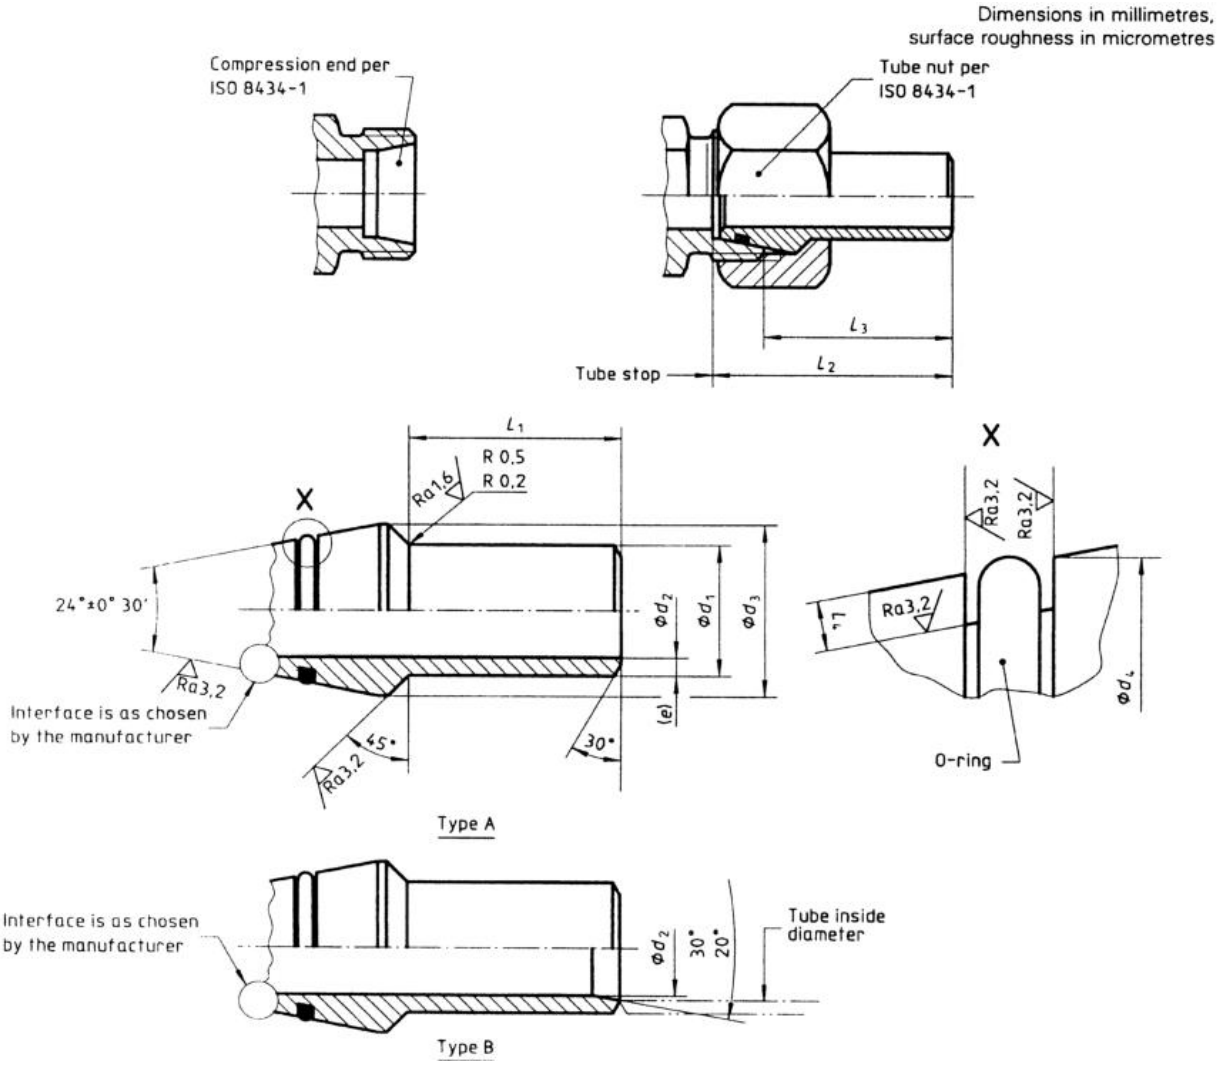


Series	Tube OD	d1 ±0.1	d2 +0.20 -0.05	d3 min.	d3 max.	d4 max.	L1 +0.2	L2 ±-1	L3 ±-1	L4 ±0.1
L	15	15	10	18	20	17	22	35	28	1.5
	18	18	13	21	24	20	23	37	29.5	1.5
	22	22	17	25	27	24	24.5	39.5	32	1.5
	28	28	23	31	33	30	27.5	42.5	35	1.5
	35	35	29	40	42	37.7	30.5	49.5	39	1.9
	42	42	36	47	49	44.7	30.5	50	39	1.9
S	6	6	2.5	9	11	7.8	19	32	25	1.1
	8	8	4	11	13	9.8	19	32	25	1.1
	10	10	6	14	16	12	20	33.5	26	1.l
	12	12	8	16	18	14	20	33.5	26	1.1
	16	16	11	20	22	18	26	40.5	32	1.5
	20	20	14	24	27	22.6	28.5	47	36.5	1.8
	25	25	19	29	33	27.6	33.5	53.5	41.5	1.8
	30	30	24	35	39	32.7	35.5	57.5	44	1.8
	38	38	32	43	49	40.7	39.5	64.5	48.5	1.8

DIN swivel nut end combination type of hose fitting

ISO 12151-2 Hose fittings with ISO 8434-4 24° cone connector ends with O-rings

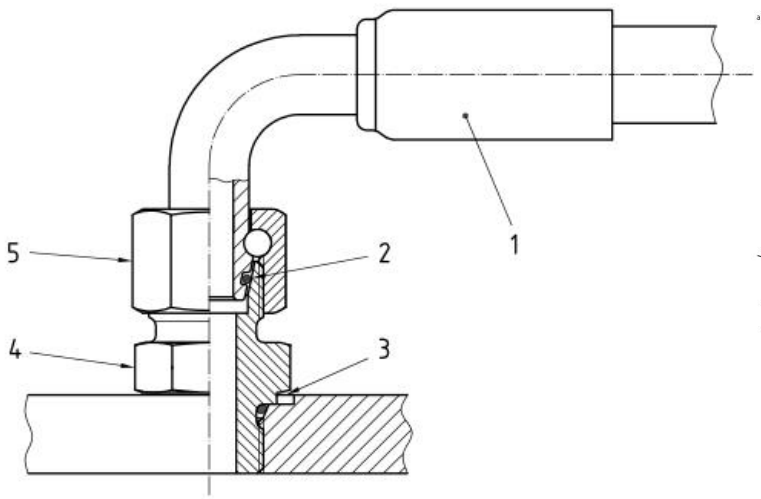


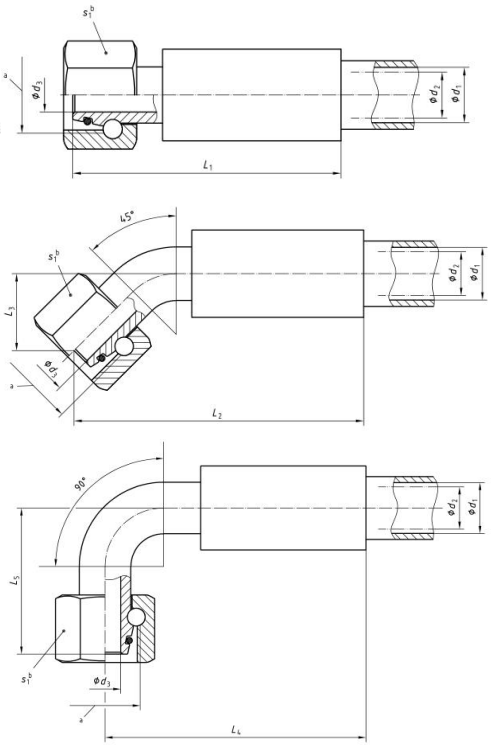

Key

1 hose fitting
2 O-ring seal
3 port
4 adapter
5 nut


2C/2D Dimension sheet of tube to swivel straight connector

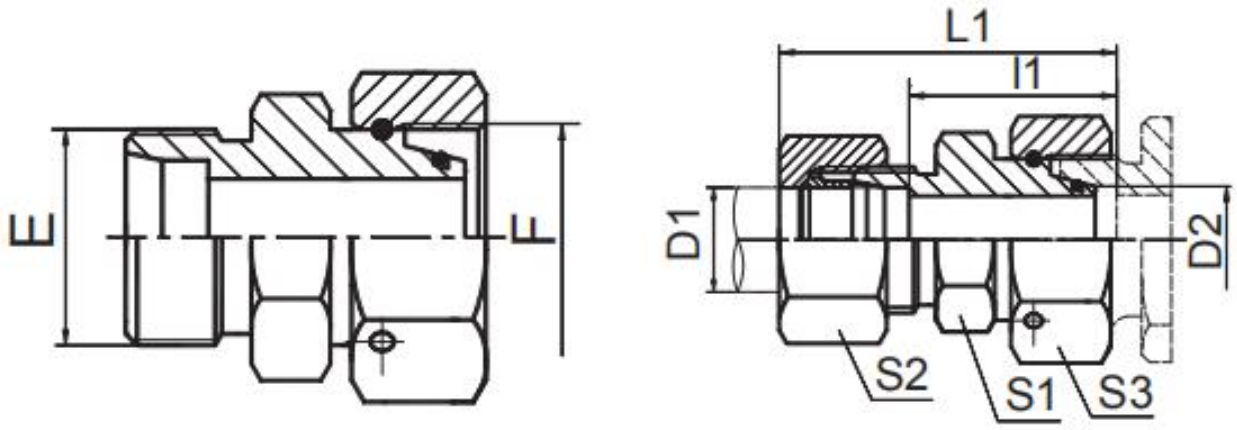


REF: ISO 8434-1 RWSW/ DIN 3865/DIN 2353; Interchangeable into Parker RED


PART NO.	THREAD		TUBE O.D.		DIMENSIONS					weight	Parker No.
	E	F	D1	D2	l1	L1	S1	S2	S3	g/1pc	
2C-12-14	M12X1.5	M14X1.5	6	8	23.5	38	12	14	17	29	RED08/06LOMD
2C-12-16	M12X1.5	M16X1.5	6	10	25	40	14	14	19	36	RED10/06LOMD
2C-14-16	M14X1.5	M16X1.5	8	10	25	40	14	17	19	38	RED10/08LOMD
2C-12-18	M12X1.5	M18X1.5	6	12	25	40	17	14	22	49	RED12/06LOMD
2C-14-18	M14X1.5	M18X1.5	8	12	25	40	17	17	22	49	RED12/08LOMD
2C-16-18	M16X1.5	M18X1.5	10	12	26	41	17	19	22	51	RED12/10LOMD
2C-12-22	M12X1.5	M22X1.5	6	15	28.5	43	19	14	27	81	RED15/06LOMD
2C-14-22	M14X1.5	M22X1.5	8	15	28.5	43	19	17	27	85	RED15/08LOMD
2C-16-22	M16X1.5	M22X1.5	10	15	29.5	44	19	19	27	83	RED15/10LOMD
2C-18-22	M18X1.5	M22X1.5	12	15	29.5	44	19	22	27	83	RED15/12LOMD
2C-12-26	M12X1.5	M26X1.5	6	18	28	43	24	14	32	109	RED18/06LOMD
2C-22-26	M22X1.5	M26X1.5	15	18	30	45	24	27	32	115	RED18/15LOMD
2C-12-30	M12X1.5	M30X2	6	22	32	47	27	14	36	158	RED22/06LOMD
2C-14-30	M14X1.5	M30X2	8	22	32	47	27	17	36	158	RED22/08LOMD
2C-16-30	M16X1.5	M30X2	10	22	33	48	27	19	36	159	RED22/10LOMD
2C-18-30	M18X1.5	M30X2	12	22	33	48	27	22	36	157	RED22/12LOMD
2C-22-30	M22X1.5	M30X2	15	22	34	49	27	27	36	164	RED22/15LOMD
2C-26-30	M26X1.5	M30X2	18	22	33.5	50	27	32	36	167	RED22/18LOMD
2C-12-36	M12X1.5	M36X2	6	28	34	49	36	14	41	219	RED28/06LOMD
2C-14-36	M14X1.5	M36X2	8	28	34	49	36	17	41	221	RED28/08LOMD
2C-16-36	M16X1.5	M36X2	10	28	35	50	36	19	41	213	RED28/10LOMD
2C-18-36	M18X1.5	M36X2	12	28	35	50	36	22	41	213	RED28/12LOMD
2C-22-36	M22X1.5	M36X2	15	28	36	51	36	27	41	218	RED28/15LOMD
2C-26-36	M26X1.5	M36X2	18	28	35.5	52	36	32	41	220	RED28/18LOMD

2C-30-36	M30X2	M36X2	22	28	37.5	54	36	36	41	222	RED28/22LOMD
2C-12-45	M12X1.5	M45X2	6	35	37	52	41	14	50	318	RED35/06LOMD
2C-14-45	M14X1.5	M45X2	8	35	37	52	41	17	50	318	RED35/08LOMD
2C-16-45	M16X1.5	M45X2	10	35	38	53	41	19	50	318	RED35/10LOMD
2C-18-45	M18X1.5	M45X2	12	35	38	53	41	22	50	324	RED35/12LOMD
2C-22-45	M22X1.5	M45X2	15	35	39	54	41	27	50	328	RED35/15LOMD
2C-26-45	M26X1.5	M45X2	18	35	38.5	55	41	32	50	328	RED35/18LOMD
2C-30-45	M30X2	M45X2	22	35	40.5	57	41	36	50	331	RED35/22LOMD
2C-36-45	M36X2	M45X2	28	35	40.5	57	41	41	50	327	RED35/28LOMD
2C-16-52	M16X1.5	M52X2	10	42	41.5	56	50	19	60	537	RED42/10LOMD
2C-18-52	M18X1.5	M52X2	12	42	41.5	56	50	22	60	538	RED42/12LOMD
2C-22-52	M22X1.5	M52X2	15	42	42.5	58	50	27	60	534	RED42/15LOMD
2C-26-52	M26X1.5	M52X2	18	42	42	58	50	32	60	544	RED42/18LOMD
2C-30-52	M30X2	M52X2	22	42	44	60	50	36	60	543	RED42/22LOMD
2C-36-52	M36X2	M52X2	28	42	44	61	50	41	60	539	RED42/28LOMD
2C-45-52	M45X2	M52X2	35	42	43	65	50	50	60	541	RED42/35LOMD
PART NO.	E	F	D1	D2	l1	L1	S1	S2	S3	g/1pc	Parker No.

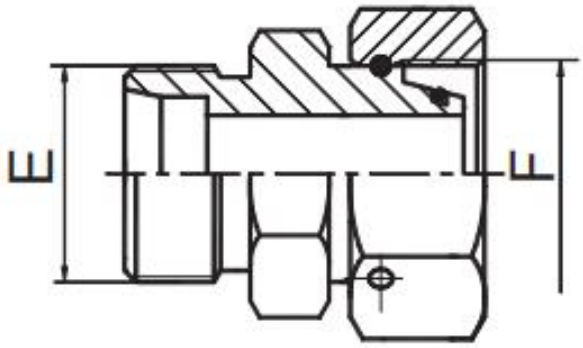

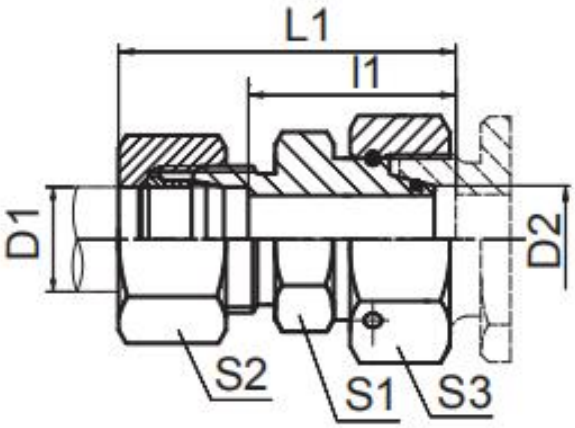


2C4/2D4 Dimension sheet of tube to swivel 45 degree elbow connector

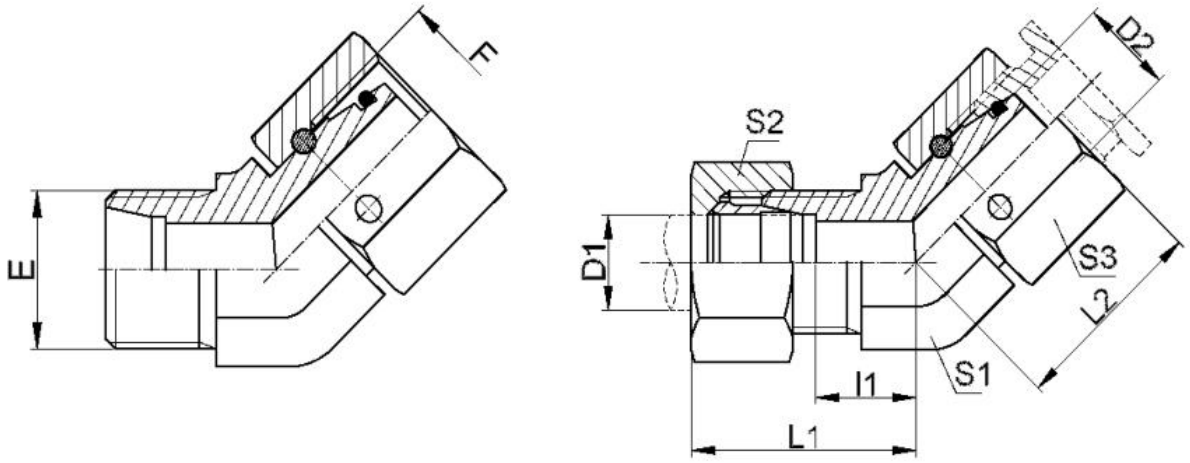

REF: ISO 8434-1 SWOE45 DIN 3865/DIN 2353; Interchangeable into Parker EV

PART NO.	THREAD		TUBE O.D.		O O-RING	DIMENSIONS						weight	Parker No.
	E	F	D1	D2		l1	L1	L2	S1	S2	S3	g/1pc	
L SERIES													
2C4-12	M12X1.5	M12X1.5	6	6	O04.5x1.5	10.5	25	23	11	14	14	37	EV06LOMD
2C4-14	M14X1.5	M14X1.5	8	8	O06.5x1.5	11	25.5	23.7	14	17	17	49	EV08LOMD
2C4-16	M16X1.5	M16X1.5	10	10	O08.0x1.5	12	26.5	23.5	16	19	19	77	EV10LOMD
2C4-18	M18X1.5	M18X1.5	12	12	O10.0x1.5	13	27.5	25.5	19	22	22	86	EV12LOMD
2C4-22	M22X1.5	M22X1.5	15	15	O12.0x2.0	15	30	26.6	22	27	27	144	EV15LOMD
2C4-26	M26X1.5	M26X1.5	18	18	O15.0x2.0	17.5	33.5	30	27	32	32	210	EV18LOMD
2C4-30	M30X2	M30X2	22	22	O20.0x2.0	19.5	35.5	33	30	36	36	270	EV22LOMD
2C4-36	M36X2	M36X2	28	28	O26.0x2.0	21.5	38	36	36	41	41	385	EV28LOMD
2C4-45	M45X2	M45X2	35	35	O32.0x2.5	25.5	47	45	48	50	50	805	EV35LOMD
2C4-52	M52X2	M52X2	42	42	O38.0x2.5	26	48.5	45.5	50	60	60	887	EV42LOMD
S SERIES													
2D4-14	M14X1.5	M14X1.5	6	6	O04.5x1.5	13	27.5	24	14	17	17	50	EV06SOMD
2D4-16	M16X1.5	M16X1.5	8	8	O06.5x1.5	13.5	28	25	16	19	19	80	EV08SOMD
2D4-18	M18X1.5	M18X1.5	10	10	O08.0x1.5	13.8	29.8	26	19	22	22	95	EV10SOMD
2D4-20	M20X1.5	M20X1.5	12	12	O10.0x1.5	14.5	30.5	27.5	19	24	24	137	EV12SOMD
2D4-22	M22X1.5	M22X1.5	14	14	O11.0x2.0	16	33.5	27.6	22	27	27	146	EV14SOMD
2D4-24	M24X1.5	M24X1.5	16	16	O13.0x2.0	16	34	36.5	22	30	30	217	EV16SOMD
2D4-30	M30X2	M30X2	20	20	O16.3x2.4	18.5	40	35	30	36	36	313	EV20SOMD
2D4-36	M36X2	M36X2	25	25	O20.3x2.4	19	43	52.5	36	46	46	529	EV25SOMD
2D4-42	M42X2	M42X2	30	30	O25.3x2.4	24	50.5	44.5	41	50	50	940	EV30SOMD
2D4-52	M52X2	M52X2	38	38	O33.3x2.4	25.5	56	48.5	50	60	60	1055	EV38SOMD


2C9/2D9 Dimension sheet of tube to swivel elbow connector

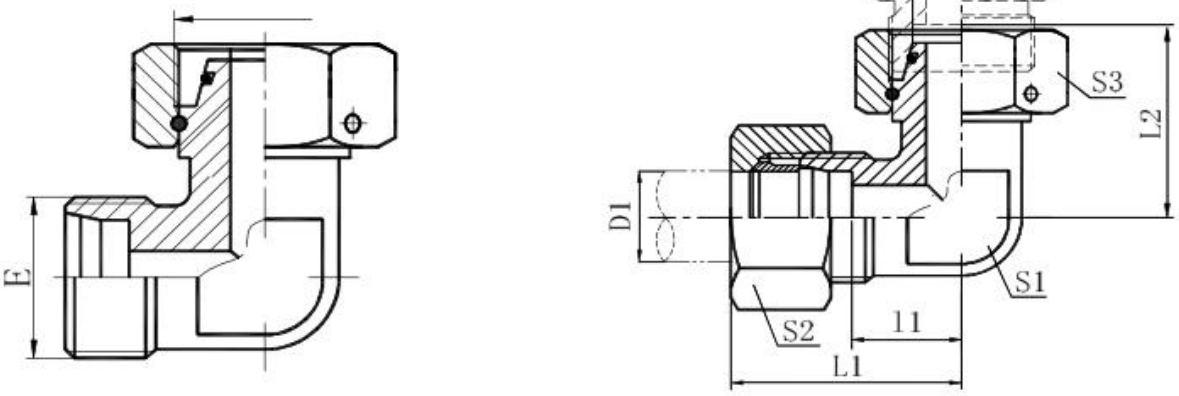

REF: ISO 8434-1 SWOE DIN 3865/DIN 2353; Interchangeable into Parker EW

PART NO.	THREAD		TUBE O.D.		DIMENSIONS						weight	Parker No.
	E	F	D1	D2	l1	L1	L2	S1	S2	S3	g/1pc	
L SERIES												
2C9-12	M12X1.5	M12X1.5	6	6	12	27	26	12	14	14	34	EW06LOMD
2C9-14	M14X1.5	M14X1.5	8	8	14	29	27.5	12	17	17	43	EW08LOMD
2C9-16	M16X1.5	M16X1.5	10	10	15	30	29	14	19	19	58	EW10LOMD
2C9-18	M18X1.5	M18X1.5	12	12	17	32	29.5	17	22	22	81	EW12LOMD
2C9-22	M22X1.5	M22X1.5	15	15	21	36	32.5	19	27	27	128	EW15LOMD
2C9-26	M26X1.5	M26X1.5	18	18	23.5	40	35.5	24	32	32	197	EW18LOMD
2C9-30	M30X2	M30X2	22	22	27.5	44	38.5	27	36	36	258	EW22LOMD
2C9-36	M36X2	M36X2	28	28	30.5	47	41.5	36	41	41	370	EW28LOMD
2C9-45	M45X2	M45X2	35	35	34.5	56	51	41	50	50	593	EW35LOMD
2C9-52	M52X2	M52X2	42	42	40	63	56	50	60	60	993	EW42LOMD
S SERIES												
2D9-14	M14X1.5	M14X1.5	6	6	16	31	27	12	17	17	48	EW06SOMD
2D9-16	M16X1.5	M16X1.5	8	8	17	32	27.5	14	19	19	65	EW08SOMD
2D9-18	M18X1.5	M18X1.5	10	10	17.5	34	30	17	22	22	92	EW10SOMD
2D9-20	M20X1.5	M20X1.5	12	12	21.5	38	31	17	24	24	107	EW12SOMD
2D9-22	M22X1.5	M22X1.5	14	14	22	40	35	19	27	27	146	EW14SOMD
2D9-24	M24X1.5	M24X1.5	16	16	24.5	43	36.5	24	30	30	212	EW16SOMD
2D9-30	M30X2	M30X2	20	20	26.5	48	44.5	27	36	36	309	EW20SOMD
2D9-36	M36X2	M36X2	25	25	30	54	50	36	46	46	547	EW25SOMD
2D9-42	M42X2	M42X2	30	30	35.5	62	55	41	50	50	744	EW30SOMD
2D9-52	M52X2	M52X2	38	38	41	72	63	50	60	60	1222	EW38SOMD


BC/BD Dimension sheet of tube to swivel branch tee connector

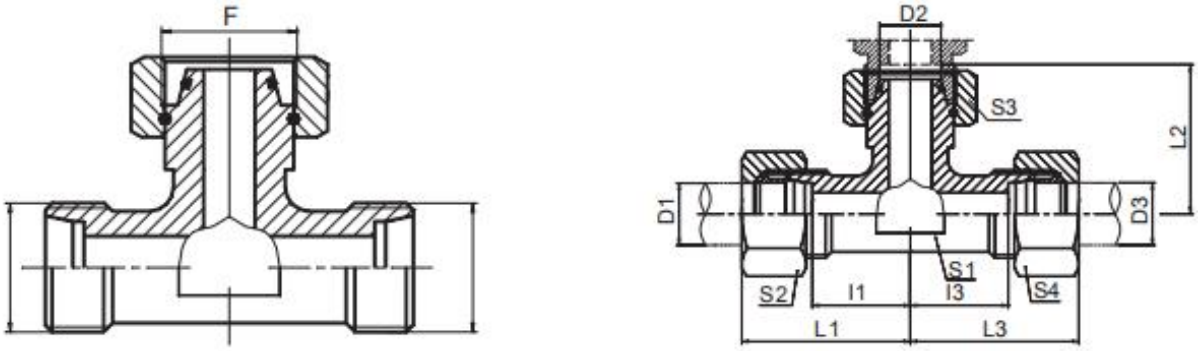

REF: ISO 8434-1 SWOBT DIN 3865/DIN 2353; Interchangeable into Parker ET

	THREAD		TUBE O.D.		DIMENSIONS						weight	Parker No.
PART NO.	E,G	F	D1,D3	D2	l1,l3	L1,L3	L2	S1	S2,S4	S3	g/1pc	
L SERIES												
BC-12	M12X1.5	M12X1.5	6	6	12	27	26	12	14	14	42	ET06LOMD
BC-14	M14X1.5	M14X1.5	8	8	14	29	27.5	12	17	17	53	ET08LOMD
BC-16	M16X1.5	M16X1.5	10	10	15	30	29	14	19	19	71	ET10LOMD
BC-18	M18X1.5	M18X1.5	12	12	17	32	29.5	17	22	22	97	ET12LOMD
BC-22	M22X1.5	M22X1.5	15	15	21	36	32.5	19	27	27	159	ET15LOMD
BC-26	M26X1.5	M26X1.5	18	18	23.5	40	35.5	24	32	32	239	ET18LOMD
BC-30	M30X2	M30X2	22	22	27.5	44	38.5	27	36	36	308	ET22LOMD
BC-36	M36X2	M36X2	28	28	30.5	47	41.5	36	41	41	449	ET28LOMD
BC-45	M45X2	M45X2	35	35	34.5	56	51	41	50	50	679	ET35LOMD
BC-52	M52X2	M52X2	42	42	40	63	56	50	60	60	1131	ET42LOMD
S SERIES												
BD-14	M14X1.5	M14X1.5	6	6	16	31	27	12	17	17	63	ET06SOMD
BD-16	M16X1.5	M16X1.5	8	8	17	32	27.5	14	19	19	79	ET08SOMD
BD-18	M18X1.5	M18X1.5	10	10	17.5	34	30	17	22	22	113	ET10SOMD
BD-20	M20X1.5	M20X1.5	12	12	21.5	38	31	17	24	24	136	ET12SOMD
BD-22	M22X1.5	M22X1.5	14	14	22	40	35	19	27	27	173	ET14SOMD
BD-24	M24X1.5	M24X1.5	16	16	24.5	43	36.5	24	30	30	239	ET16SOMD
BD-30	M30X2	M30X2	20	20	26.5	48	44.5	27	36	36	388	ET20SOMD
BD-36	M36X2	M36X2	25	25	30	54	50	36	46	46	652	ET25SOMD
BD-42	M42X2	M42X2	30	30	35.5	62	55	41	50	50	905	ET30SOMD
BD-52	M52X2	M52X2	38	38	41	72	63	50	60	60	1462	ET38SOMD


CC/CD Dimension sheet of tube to swivel run tee connector

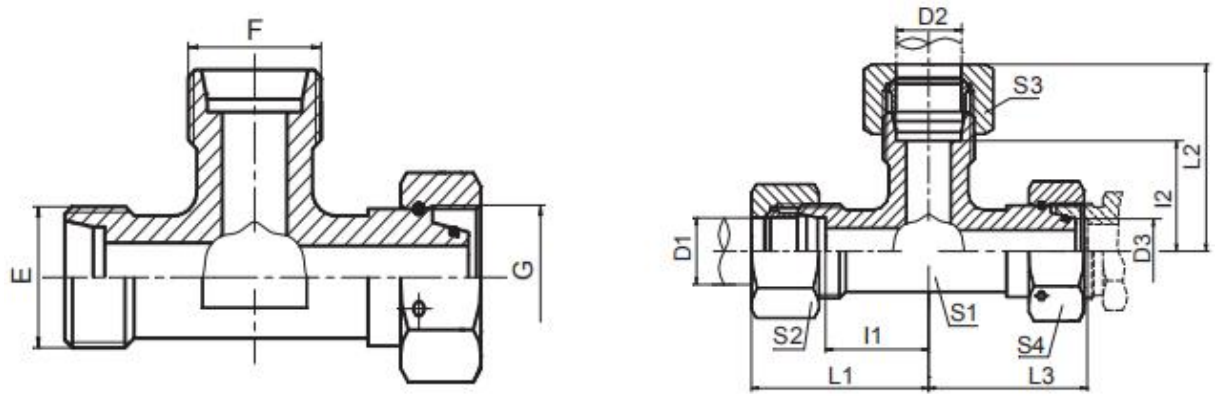

REF: ISO 8434-1 SWORT DIN 3865/DIN 2353; Interchangeable into Parker EL

PART NO.	THREAD		TUBEO.D.		DIMENSIONS						weight	Parker No.
	E,F	G	D1,D2	D3	l1,l2	L1,L2	L3	S1	S2,S3	S4	g/1pc	
L SERIES												
CC-12	M12X1.5	M12X1.5	6	6	12	27	26	12	14	14	44	EL06LOMD
CC-14	M14X1.5	M14X1.5	8	8	14	29	27.5	12	17	17	53	EL08LOMD
CC-16	M16X1.5	M16X1.5	10	10	15	30	29	14	19	19	68	EL10LOMD
CC-18	M18X1.5	M18X1.5	12	12	17	32	29.5	17	22	22	95	EL12LOMD
CC-22	M22X1.5	M22X1.5	15	15	21	36	32.5	19	27	27	151	EL15LOMD
CC-26	M26X1.5	M26X1.5	18	18	23.5	40	35.5	24	32	32	233	EL18LOMD
CC-30	M30X2	M30X2	22	22	27.5	44	38.5	27	36	36	309	EL22LOMD
CC-36	M36X2	M36X2	28	28	30.5	47	41.5	36	41	41	436	EL28LOMD
CC-45	M45X2	M45X2	35	35	34.5	56	51	41	50	50	666	EL35LOMD
CC-52	M52X2	M52X2	42	42	40	63	56	50	60	60	1163	EL42LOMD
S SERIES												
CD-14	M14X1.5	M14X1.5	6	6	16	31	27	12	17	17	65	EL06SOMD
CD-16	M16X1.5	M16X1.5	8	8	17	32	27.5	14	19	19	84	EL08SOMD
CD-18	M18X1.5	M18X1.5	10	10	17.5	34	30	17	22	22	118	EL10SOMD
CD-20	M20X1.5	M20X1.5	12	12	21.5	38	31	17	24	24	136	EL12SOMD
CD-22	M22X1.5	M22X1.5	14	14	22	40	35	19	27	27	173	EL14SOMD
CD-24	M24X1.5	M24X1.5	16	16	24.5	43	36.5	24	30	30	260	EL16SOMD
CD-30	M30X2	M30X2	20	20	26.5	48	44.5	27	36	36	375	EL20SOMD
CD-36	M36X2	M36X2	25	25	30	54	50	36	46	46	655	EL25SOMD
CD-42	M42X2	M42X2	30	30	35.5	62	55	41	50	50	906	EL30SOMD
CD-52	M52X2	M52X2	38	38	41	72	63	50	60	60	1472	EL38SOMD


3C/3D Dimension sheet of swivel to swivel straight connector

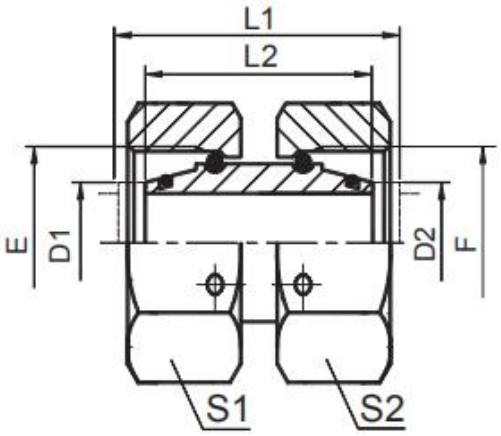

REF: ISO 8434-1 DIN 3865/DIN 2353; Interchangeable into Parker GZ

PART NO.	THREAD	TUBE OD	DIMENSIONS			weight	Parker No.
	E,F	D1,D2	L1	L2	S1,S2	g/1pc	
L SERIES							
3C-12	M12X1.5	6	33	32	14	28	GZ06L
3C-14	M14X1.5	8	33	32	17	41	GZ08L
3C-16	M16X1.5	10	34	33	19	53	GZ10L
3C-18	M18X1.5	12	34	33	22	71	GZ12L
3C-22	M22X1.5	15	39	38	27	129	GZ15L
3C-26	M26X1.5	18	41	39	32	165	GZ18L
3C-30	M30X2	22	44	42	36	243	GZ22L
3C-36	M36X2	28	48	46	46	319	GZ28L
3C-45	M45X2	35	52	48	50	449	GZ35L
3C-52	M52X2	42	57	52	60	737	GZ42L
S SERIES							
3D-14	M14X1.5	6	33	32	17	41	GZ06S
3D-16	M16X1.5	8	34	33	19	54	GZ08S
3D-18	M18X1.5	10	35	33	22	74	GZ10S
3D-20	M20X1.5	12	38	36	24	95	GZ12S
3D-22	M22X1.5	14	41	39	27	131	GZ14S
3D-24	M24X1.5	16	42	39	30	172	GZ16S
3D-30	M30X2	20	48	44	36	261	GZ20S
3D-36	M36X2	25	53	46	46	477	GZ25S
3D-42	M42X2	30	62	52	50	605	GZ30S
3D-52	M52X2	38	67	52	60	826	GZ38S


2BC/2BD-WD Dimension Male BSPP Stub ISO 1179-2 ED seal to swivel straight connector

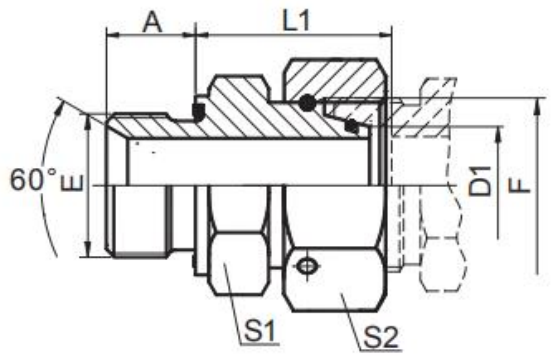

REF: ISO 8434-1 SWSDS/DIN 3865/DIN 2353; Interchangeable into Parker EGE-R-ED

PART NO.	THREAD		TUBE OD	DIMENSIONS				weight	Parker No.
	E	F	D1	A	L1	S1	S2	g/1pc	
L SERIES									
2BC-02-12WD	G1/8"X28	M12X1.5	6	8	24.5	14	14	27	EGE06LRED
2BC-04-14WD	G1/4"X19	M14X1.5	8	12	29.5	19	17	28	EGE08LRED
2BC-04-16WD	G1/4"X19	M16X1.5	10	12	27.5	19	19	54	EGE10LRED
2BC-06-18WD	G3/8"X19	M18X1.5	12	12	34	22	22	95	EGE12LRED
2BC-08-22WD	G1/2"X14	M22X1.5	15	14	32	27	27	137	EGE15LRED
2BC-08-26WD	G1/2"X14	M26X1.5	18	14	31.5	27	32	143	EGE18LRED
2BC-12-30WD	G3/4"X14	M30X2	22	16	32.5	32	36	200	EGE22LRED
2BC-16-36WD	G1"X11	M36X2	28	18	35	41	41	289	EGE28LRED
2BC-20-45WD	G1.1/4"X11	M45X2	35	20	42.5	50	50	500	EGE35LRED
2BC-24-52WD	G1.1/2"X11	M52X2	42	22	46.5	55	60	718	EGE42LRED
S SERIES									
2BD-04-14WD	G1/4"X19	M14X1.5	6	12	27	19	17	53	EGE06SRED
2BD-04-16WD	G1/4"X19	M16X1.5	8	12	29.5	19	19	64	EGE08SRED
2BD-06-18WD	G3/8"X19	M18X1.5	10	12	32	22	22	93	EGE10SRED
2BD-06-20WD	G3/8"X19	M20X1.5	12	12	34	22	24	100	EGE12SRED
2BD-08-22WD	G1/2"X14	M22X1.5	14	14	36.5	27	27	157	EGE14SRED
2BD-08-24WD	G1/2"X14	M24X1.5	16	14	37	27	30	170	EGE16SRED
2BD-12-30WD	G3/4"X14	M30X2	20	16	43	32	36	273	EGE20SRED
2BD-16-36WD	G1"X11	M36X2	25	18	48	41	46	493	EGE25SRED
2BD-20-42WD	G1.1/4"X11	M42X2	30	20	51	50	50	691	EGE30SRED
2BD-24-52WD	G1.1/2"X11	M52X2	38	22	60	55	60	934	EGE38SRED

2MC/2MD-WD Dimension sheet of Male Metric Stub ISO 9974-2 ED seal to swivel straight connector

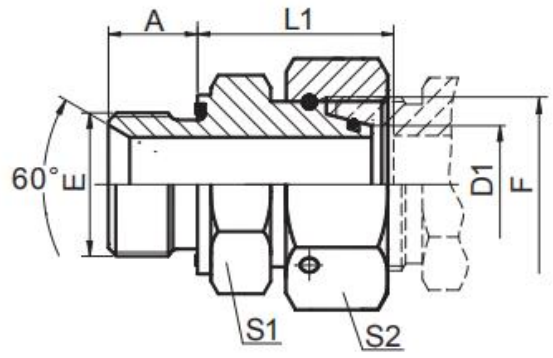

REF: ISO 8434-1 SWSDS/DIN 3865/DIN 2353; Interchangeable into Parker EGE-M-ED

PART NO.	THREAD		TUBE O.D.	DIMENSIONS				weight	Parker No.
	E	F	D1	A	L1	S1	S2	g/1pc	
L SERIES									
2MC-10-12WD	M10X1	M12X1.5	6	8	24.5	14	14	27	EGE06LMED
2MC-12-14WD	M12X1.5	M14X1.5	8	12	26.5	17	17	45	EGE08LMED
2MC-14-16WD	M14X1.5	M16X1.5	10	12	27.5	19	19	57	EGE10LMED
2MC-16-18WD	M16X1.5	M18X1.5	12	12	30.5	22	22	82	EGE12LMED
2MC-18-22WD	M18X1.5	M22X1.5	15	12	31.5	24	27	113	EGE15LMED
2MC-22-26WD	M22X1.5	M26X1.5	18	14	31.5	27	32	148	EGE18LMED
2MC-26-30WD	M26X1.5	M30X2	22	16	32.5	32	36	203	EGE22LMED
2MC-33-36WD	M33X2	M36X2	28	18	35	41	41	289	EGE28LMED
2MC-42-45WD	M42X2	M45X2	35	20	42.5	50	50	511	EGE35LMED
2MC-48-52WD	M48X2	M52X2	42	22	46.5	55	60	711	EGE42LMED
S SERIES									
2MD-12-14WD	M12X1.5	M14X1.5	6	12	27	17	17	47	EGE06SMED
2MD-14-16WD	M14X1.5	M16X1.5	8	12	29.5	19	19	65	EGE08SMED
2MD-16-18WD	M16X1.5	M18X1.5	10	12	32	22	22	91	EGE10SMED
2MD-18-20WD	M18X1.5	M20X1.5	12	12	34	24	24	112	EGE12SMED
2MD-20-22WD	M20X1.5	M22X1.5	14	14	36.5	27	27	153	EGE14SMED
2MD-22-24WD	M22X1.5	M24X1.5	16	14	37	27	30	174	EGE16SMED
2MD-27-30WD	M27X2	M30X2	20	16	43	32	36	274	EGE20SMED
2MD-33-36WD	M33X2	M36X2	25	18	48	41	46	497	EGE25SMED
2MD-42-42WD	M42X2	M42X2	30	20	51	50	50	691	EGE30SMED
2MD-48-52WD	M48X2	M52X2	38	22	60	55	60	957	EGE38SMED