
EVGE-M-ED Standpipe connector

Male metric thread – ED (ISO 9974) / EO standpipe adjustable

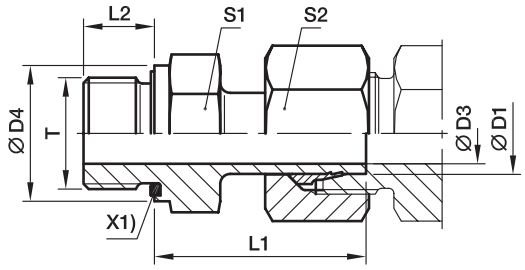

X1) Eolastic-sealing ED

Pre-assembled nut and ring.
Final assembly (in appropriate body) at least 1/4 turn beyond the point of clearly perceptible resistance.

Series	D1	T	D3	D4	L1	L2	S1	S2	Weight g/1 piece	Order code*	PN (bar)[1] Steel	71
L[3])	06	M 10×1.0	3.5	14	24.5	8	14	14	24	**EVGE06LMED**	315	315
	08	M 12×1.5	5.5	17	26.5	12	17	17	38	**EVGE08LMED**	315	315
	10	M 14×1.5	7.0	19	27.5	12	19	19	49	**EVGE10LMED**	315	315
	12	M 16×1.5	9.0	22	30.0	12	22	22	67	**EVGE12LMED**	315	315
	15	M 18×1.5	11.0	24	30.5	12	24	27	95	**EVGE15LMED**	315	315
	18	M 22×1.5	14.0	27	31.5	14	27	32	137	**EVGE18LMED**	315	315
	22	M 26×1.5	18.0	32	32.5	16	32	36	183	**EVGE22LMED**	160	160
	28	M 33×2.0	23.0	40	35.0	18	41	41	264	**EVGE28LMED**	160	160
	35	M 42×2.0	29.5	50	42.5	20	50	50	444	**EVGE35LMED**	160	160
	42	M 48×2.0	35.5	55	46.5	22	55	60	614	**EVGE42LMED**	160	160
S[4])	06	M 12×1.5	3.5	17	27.0	12	17	17	43	**EVGE06SMED**	630	630
	08	M 14×1.5	4.5	19	29.5	12	19	19	59	**EVGE08SMED**	630	630
	10	M 16×1.5	6.5	22	32.0	12	22	22	82	**EVGE10SMED**	630	630
	12	M 18×1.5	7.5	24	34.0	12	24	24	104	**EVGE12SMED**	630	630
	16	M 22×1.5	11.5	27	37.0	14	27	30	162	**EVGE16SMED**	400	400
	20	M 27×2.0	15.5	32	43.0	16	32	36	254	**EVGE20SMED**	400	400
	25	M 33×2.0	18.0	40	48.0	18	41	46	493	**EVGE25SMED**	400	400
	30	M 42×2.0	23.5	50	51.0	20	50	50	654	**EVGE30SMED**	400	400
	38	M 48×2.0	29.0	55	60.0	22	55	60	962	**EVGE38SMED**	315	315

[1]) Pressure shown = item deliverable

[3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

The use of the swivel nut fitting EGE is to be prefered (see page I60).

Information on ordering alternative sealing materials see page I7.


*Please add the **suffixes** below according to the material/surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additonal. suffix needed)
Steel	CF	EVGE16SMEDCF	NBR
Stainless Steel	71	EVGE16SMED71	VIT

www.fitsch.cn

EVGE-R-ED Standpipe connector

Male BSPP thread – ED-seal (ISO 1179) / EO standpipe adjustable

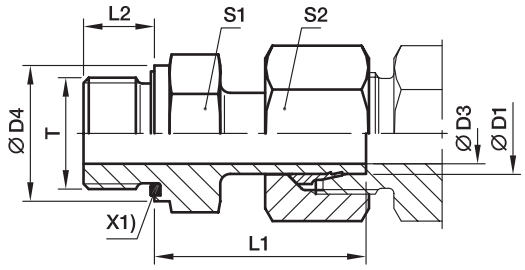

X1) Eolastic-sealing ED

Pre-assembled nut and ring.
Final assembly (in appropriate body) at least 1/4 turn beyond the point of clearly perceptible resistance.

Series	D1	T	D3	D4	L1	L2	S1	S2	Weight g/1 piece	Order code*	PN (bar)[1] Steel	71	MS
L[3])	06	G 1/8 A	3.5	14	24.5	8	14	14	24	**EVGE06LRED**	315	315	200
	08	G 1/4 A	4.5	19	29.5	12	19	17	52	**EVGE08LRED**	315	315	200
	10	G 1/4 A	7.0	19	27.5	12	19	19	47	**EVGE10LRED**	315	315	200
	12	G 3/8 A	7.5	22	34.0	12	22	22	87	**EVGE12LRED**	315	315	200
	12	G 1/4 A	7.0	19	28.5	12	19	22	61	**EVGE12LR1/4ED**	315		
	12	G 1/2 A	7.5	27	34.5	14	27	22	121	**EVGE12LR1/2ED**	315	315	
	15	G 1/2 A	11.0	27	31.0	14	27	27	114	**EVGE15LRED**	315	315	200
	18	G 1/2 A	14.0	27	31.5	14	27	32	132	**EVGE18LRED**	315	315	200
	22	G 3/4 A	18.0	32	32.5	16	32	36	183	**EVGE22LRED**	160	160	100
	28	G 1 A	23.0	40	35.0	18	41	41	262	**EVGE28LRED**	160	160	
	35	G 1 1/4 A	29.5	50	42.5	20	50	50	436	**EVGE35LRED**	160	160	
	42	G 1 1/2 A	35.5	55	46.5	22	55	60	615	**EVGE42LRED**	160	160	
S[4])	06	G 1/4 A	3.5	19	27.0	12	19	17	48	**EVGE06SRED**	630	630	
	08	G 1/4 A	4.5	19	29.5	12	19	19	57	**EVGE08SRED**	630	630	
	10	G 3/8 A	6.5	22	32.0	12	22	22	84	**EVGE10SRED**	630	630	
	12	G 3/8 A	7.5	22	34.0	12	22	24	95	**EVGE12SRED**	630	630	
	12	G 1/2 A	7.5	27	34.5	14	27	24	130	**EVGE12SR1/2ED**	630	630	
	16	G 1/2 A	11.5	27	37.0	14	27	30	158	**EVGE16SRED**	400	400	
	16	G 3/4 A	11.5	32	39.0	16	32	30	222	**EVGE16SR3/4ED**	400		
	20	G 3/4 A	15.5	32	43.0	16	32	36	254	**EVGE20SRED**	400	400	
	25	G 1 A	18.0	40	48.0	18	41	46	485	**EVGE25SRED**	400	400	
	30	G 1 1/4 A	23.5	50	51.0	20	50	50	661	**EVGE30SRED**	400	400	
	38	G 1 1/2 A	29.0	55	60.0	22	55	60	962	**EVGE38SRED**	315	315	

[1]) Pressure shown = item deliverable

[3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

The use of the swivel nut fitting EGE is to be prefered (see page I61).

Information on ordering alternative sealing materials see page I7.

*Please add the **suffixes** below according to the material/surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additonal. suffix needed)
Steel	CF	EVGE16SREDCF	NBR
Stainless Steel	71	EVGE16SRED71	VIT
Brass	MS	EVGE16SREDMS	NBR

www.fitsch.cn